

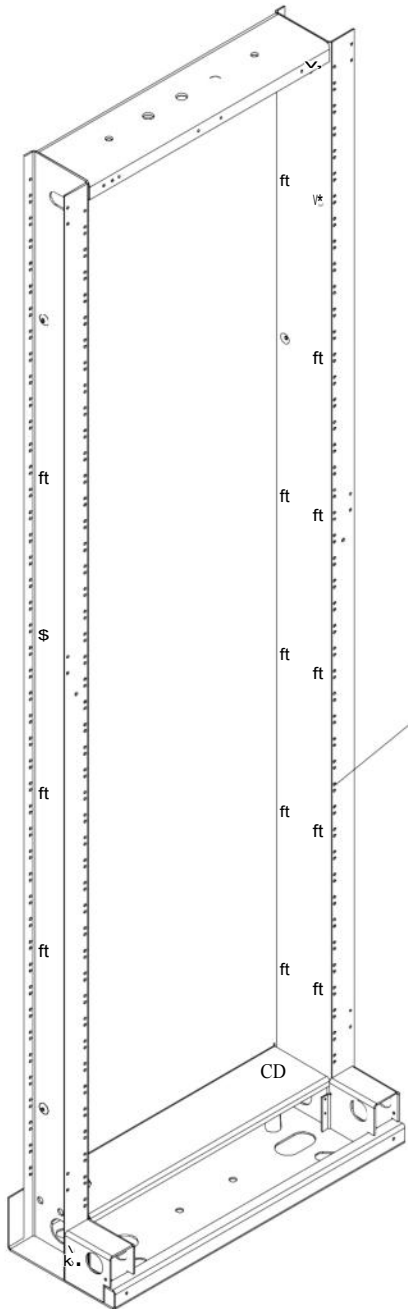


UPPER FRONT VIEW

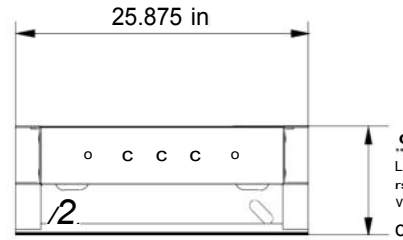


TOP VIEW

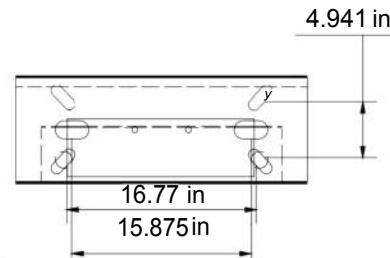


FOOTPRINT


12-24 Mounting Screws
1.75" Spacing

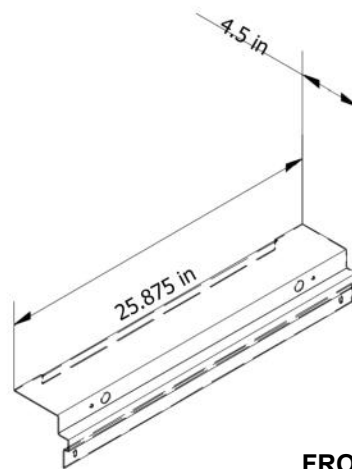

FRONT GUARD RAIL KIT

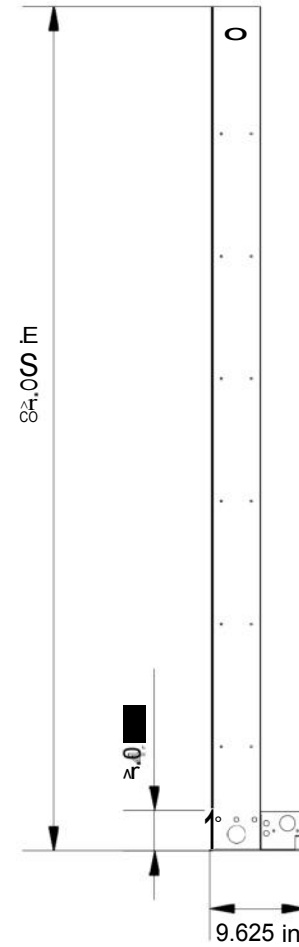

SIDE VIEW

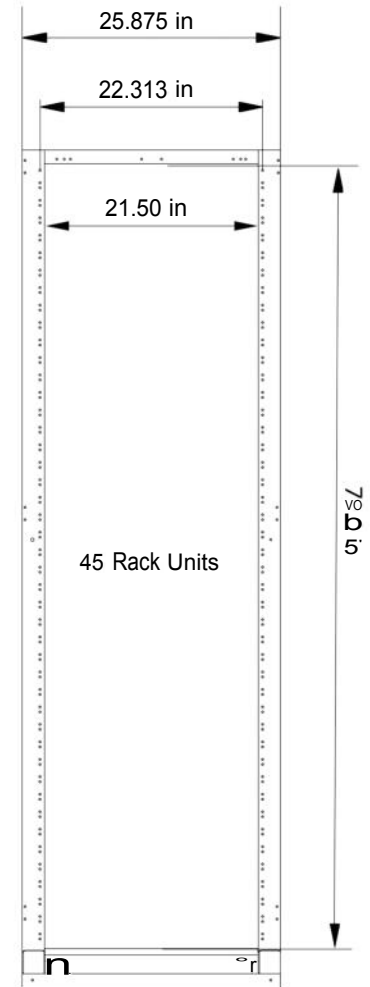

FRONT VIEW

FINISH

TELECOM GRAY POWDER
COATING

Heavy duty steel construction

TRUE 45RU

ZONE 4 seismic rated

Front/rear tapped for 12-24 screws with RU markings

Includes cover, mounting kit and (3) junction kits

Weight 67.5lbs

UL Listed load capacity: 1,500 lbs | Static load capacity:

6,000 lbs. | Seismic certified load capacity: 1,500 lbs

23" X 7' SEISMIC NETWORK BAY - UNEQUAL FLANGE

Part No. PC-23784GRR

epic
BROADBAND SOLUTIONS